

Pneumatic tools and spray-painting guns

Quality that goes deeper. From AIRKO.

Quality you won't let go again.

Once you've worked with AIRKO pneumatic tools and spray painting guns, you'll "grasp" their special suitability for daily use and their various benefits offhand ... and you'll insist on this quality from now on.

AIRKO provides power to your work. With tools that bring your strengths to bear, increasing productivity virtually on its own.

They are ...

- optimally designed according to ergonomic principles
- easy to use and easy to maintain
- versatile
- designed sturdy enough to stand their ground undamaged in toughest everyday use
- made of high-grade material
- particularly handy, and
- perfectly integrated into the overall AIRKO system.

Pneumatic tools from the specialist to ensure the best energy balance: for productive use, better results and easier maintenance.

Pneumatic tools and spray painting guns from AIRKO are always your best choice. Without fail.

Good results are based on care: this applies not only to choosing the right spray painting devices but also to the paint as well as to tool maintenance.

Using the ergonomically designed AIRKO spray painting guns, you always have all quality components well in hand and in your grip:

- Finely adjustable paint quantity regulation.
- Flat and round jet.
- Spray pressure and
- nozzle sizes.

Impact wrench 1/2"

A new strength: pneumatic tools from AIRKO.

Impact wrench GP 0706

Impact wrench with powerful vane motor and twin-hammer mechanism ensure high torque and immense power. Precision high-performance bearings and the shockproof composite housing guarantee maximum service life.

Quality profile ●●●●○



Powerful **vane motor** for maximum performance and long life



Multi-step **power control** plus rotation direction switch



Very light, high-quality **composite housing**



Optimised **downwards air exhaust**, non-slip handle and smooth-running controls for ease of use



Impact wrench GP 2428 A

Quality profile ●●●●○

Professional 1/2" impact wrench with very short overall length (only 97 mm) for tight situations. With high-performance TWIN-hammer double-impact mechanism, 3 power stages for clockwise/anticlockwise operation, cold-insulated handle and downwards air exhaust.

Impact wrench GP 3279

Quality profile ●●●●○

Industrial impact wrench 1/2" for tough applications in a shock-resistant composite housing and with a short overall length. The powerful TWIN-hammer double-impact mechanism ensures tremendous power and torque.



Type	Square drive	Working torque	Max. torque	Avg. air consumption*	Speed	Weight	Length	Min. hose diameter	Sound level	Order no.	EAN code
	[in]	[Nm]	[Nm]	[l/min]	[rpm]	[kg]	[mm]	[mm]	[dB(A)]		
GP 0706	1/2	470–880	1150	368	10 000	2.0	193	10	104	420.004	9009261200045
GP 2428 A	1/2	542	678	240	10 000	1.4	97	10	96	420.180	9009261201806
GP 3279	1/2	881	1356	120	8500	1.9	143	10	104	420.182	9009261201820

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Impact wrench 3/4", 1"

A new strength: pneumatic tools from AIRKO.

Impact wrench GP 1948 3/4"

Impact wrench with twin-hammer mechanism for very high torque and immense power. Very light, high-quality composite housing. Optimised downwards air exhaust, ergonomic handle and smooth-running controls for great ease of use.

Quality profile ●●●●○



Lubrication nipple for external lubrication of impact mechanism ensures long service life



Comfortable **one-hand reversing** for clockwise/anticlockwise operation



Multi-step **power control** for optimum control



High-quality shock-proof **composite housing**

Impact wrench GP 0770 3/4"

Quality profile ●●●●○

Professional impact wrench with outstanding power/weight ratio, twin-hammer mechanism and short length for easy access to tight spots.



Impact wrench GP 1946 1"

Quality profile ●●●●○

Composite housing, multi-step power control for clockwise/anticlockwise operation, tremendous power and compact design with extra handle – ideal for fleet service providers.



Type	Square drive [in]	Working torque [Nm]	Max. torque [Nm]	Avg. air consumption [l/min]	Speed [rpm]	Weight [kg]	Length [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 1948	3/4	271–1.627	1898	198	5500	3.3	215	13	90	420.010	9009261200106
GP 0770	3/4	1350	1500	480	5700	4.0	216	13	97	420.014	9009261200144
GP 1946	1	1356–1763	2034	448	5300	5.1	256	13	109	420.016	9009261200168

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 3/8". Subject to technical modifications.

Impact sockets

Impact sockets from AIRKO. Made of chromium-molybdenum steel.

Impact socket PT 0243 K05 1/2"

Quality profile ●●●●●

Square socket wrench of chromium-molybdenum steel (Cr-Mo) for the professional, with anti-scratch coating for aluminium rims, 7 parts in plastic case.



Impact sockets PT 02428 K1 1/2"

Quality profile ●●●●●

Square socket wrench of CrMo steel for the professional, 12 parts in plastic case.

Impact sockets PT 02624 ML 3/4"

Quality profile ●●●●●

Square socket wrench of CrMo steel for the professional, 8 parts in sturdy metal case.

Impact sockets PT 02825 M 1"

Quality profile ●●●●●

Square socket wrench of CrMo steel for the professional, 8 parts in sturdy metal case.



Type	Fitting	Size (length)	WAF	Order no.	EAN code
	[in]	[mm]	[mm]		
PT 0243 K05	1/2	85	17, 19, 21, 22, 23, 24, 27	420.034	9009261200342
PT 02428 K1	1/2	85	10, 11, 13, 14, 17, 19, 21, 23, 24, extension 125 mm (1/2")	420.036	9009261200366
PT 02624 ML	3/4	85	24, 27, 29, 30, 32, 33, 34, 36	420.038	9009261200380
PT 02825 M	1	85	24, 27, 30, 32, 33, 36, 38, 41	420.040	9009261200403

Subject to technical modifications.

Drills

Powerful pneumatic tools from AIRKO.

Drill GP 0659 B

Drill with high-quality composite quick-change chuck with planetary gearing and needle bearings for high performance and long life. Speed control via non-slip drive switch and clockwise/anticlockwise direction control via smooth-running changeover switch.

Quality profile ●●●●○



Drill GP 0657 B

Quality profile ●●●●○

Drill with 2-stage power controller, clockwise/anticlockwise operation via quick changeover, cold-insulated and comfortable handle and low speed.

Drill GP 1808

Quality profile ●●●●○

Low weight, short length, two-step power control, planetary gearing, needle bearings and ergonomic handle for optimum ease of use.



Type	Chuck [mm]	Chuck with wrench	Quick- change chuck	Avg. air consump- tion [l/min]	Speed [rpm]	Weight [kg]	Length [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 0659 B	10		x	113	1800	1.4	165	8	84	420.030	9009261200304
GP 0657 B	13	x		113	800	1.6	210	8	84	420.186	9009261201868
GP 1808	6	x		113	2600	0.6	148	8	84	420.026	9009261200267

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Ratchet wrench

The reliable and powerful alternative from AIRKO.

Impact ratchet wrench GP 2548

Reaction-free pneumatic impact wrench for loosening and tightening screw connections that are difficult to access, in a compact design with high torque due to JUMBO hammer mechanism ensuring maximum safety at work, with torque adjustment at the cold-insulated handle.

Quality profile ●●●●○



Very flat **ratchet head** allowing optimum access for working in very tight space



2-stage power controller with clockwise/anticlockwise adjustment

Multi-function ratchet wrenches

Multi-function ratchet wrench GP 2443 K

Quality profile ●●●○○

With high power at low weight and a robust composite housing. With direct sockets 8, 10, 12, 13 and 14 mm and adapter 1/4" and 3/8" for normal sockets. Flat, closed design of the ratchet head, designed for working in very tight space and a long service life.

Ratchet wrench GP 0761 B

Quality profile ●●●●○

Professional ratchet wrench with high torque, clockwise/anticlockwise direction changeover switch and practical housing with non-slip handle.

Ratchet wrench GP 0730 PS

Quality profile ●●●●○

Ratchet wrench set in handy plastic case with 7 socket wrenches (9, 11, 12, 13, 14, 17, 19 mm), holder for 3 screwdriver bits, extension and joint holder.



Type	Fitting [in]	Working torque [Nm]	Max. torque [Nm]	Avg. air consumption [l/min]	Speed [rpm]	Weight [kg]	Length [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 2548	1/2	61-190	244	142	7000	1.8	341	10	97	420.184	9009261201844
GP 2443 K	1/4 + 3/8	41	41	85	450	0.6	210	8	93	420.019	9009261200182
GP 0761 B	1/2	80	88	170	160	1.2	260	8	98	420.020	9009261200205
GP 0730 PS	1/2	68	68	120	150	1.1	254	8	90	420.024	9009261200243

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Screwdriver

Quality you can hold in your hand: from AIRKO.

Screwdriver GP 0973

Quality profile ●●●●○

Robust, ergonomic composite housing, cylindrical for easy handling and with stepless speed control. Comfortable rotary switch for clockwise/anticlockwise operation and quick-change coupling for screwdriver bits. Soft grip with non-slip, cold-insulated handle for frequent use.



Screwdriver GP 0907 B

Quality profile ●●●●○

Ideal screwdriver with stepless speed control, quick-change coupling for bits, non-slip handle, clockwise/anticlockwise direction changeover switch, downwards air exhaust and short length.



Type	Fitting [bit]	Working torque [Nm]	Max. torque [Nm]	Avg. air consumption* [l/min]	Speed [rpm]	Weight [kg]	Length [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 0973	6 mm	1.1–10.2	10	113	1800	1.2	265	8	85	420.042	9009261200427
GP 0907 B	6 mm	5–13	13	113	1800	1.1	178	8	83	420.044	9009261200441

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Cutting

A breakthrough in tool design: AIRKO power.

Chisel hammer GP 0314 HK1

Ergonomic pistol design with specially hardened, corrosion-treated cylinder. Non-slip, cold-insulated handle with safety switch and automatic stop for perfect handling. Set of five high-quality chisels in case, made of CrMo steel, chisel length 250 mm, with retaining spring and inline oiler.

Quality profile ●●●○○○



Ergonomic **pistol shape** for professional results



Versatile set of five high-quality chisels in **case**



Power control offers stepless regulation of impact rate for rapid removal of tiles, plaster etc.



Non-slip, cold-insulated **handle**

Chisel hammer GP 0109 NHB

Quality profile ●●●○○○

Medium-heavy demolition hammer for wall-breaking and demolition of bricks and concrete, with ergonomic handle, retaining spring and two high-quality chisels of CrMo steel, chisel length 250 mm.

Chisel hammer GP 0120 H

Quality profile ●●●○○○

Heavy demolition hammer for demolition of bricks, concrete and natural stone, with ergonomic handle and two high-quality chisels of CrMo steel, chisel length 260 mm.



Type	Fitting [in]	Impact rate [rpm]	Stroke height [mm]	Avg. air consumption* [l/min]	Weight [kg]	Length [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 0314 HK1	10.20	3000	66.7	157	1.8	250	10	98	420.048	9009261200489
GP 0109 NHB	12.80	3600	50.0	350	2.8	254	13	92	420.052	9009261200526
GP 0120 H	14.70	2400	51.0	600	5.9	327	13	93	420.054	9009261200540
Retaining spring for GP 0314									420.160	9009261201608
Retaining spring for GP 109									420.162	9009261201622
Retaining spring for GP 0120 H									420.176	9009261201769

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 3/8" (except GP 0314 = 1/4"). Subject to technical modifications.

Cutting

Pneumatic tools from AIRKO made of chromium-molybdenum steel.

Spare chisels

Quality profile ●●●○○

Quality chisels of chromium-molybdenum steel for pneumatic chisel hammers
GP 0248 HB, GP 0314 HK1, GP 0109 NHB, GP 0120 H and LA 427 EU.

Hex chisel set 10.2 mm Length 180 mm

5 chisels including bolster chisel, universal chisel, double-edged sheet metal chisel, pointed chisel and sheet metal cutting chisel

Also:

Flat chisel 20 mm x 180 mm
Flat chisel 50 mm x 180 mm
Pointed chisel 180 mm

Hex chisel set 10.2 mm Length 250 mm

5 chisels including bolster chisel, universal chisel, double-edged sheet metal chisel, pointed chisel and sheet metal cutting chisel

Also:

Flat chisel 20 mm x 250 mm
Flat chisel 50 mm x 250 mm
Pointed chisel 250 mm

Demolition chisel for demolition hammer GP 0109 NHB hex 12.8 mm

Flat chisel 30 mm x 250 mm
Flat chisel 50 mm x 250 mm
Pointed chisel 250 mm
Pointed chisel 400 mm

Demolition chisel for demolition hammer GP 0120 H Hex 14.7 mm

Flat chisel 30 mm x 250 mm
Flat chisel 30 mm x 400 mm
Flat chisel 50 mm x 400 mm
Pointed chisel 250 mm
Pointed chisel 400 mm

Needle deruster attachment G 100 H

Quality profile ●●●○○

The perfect tool for rust removal and cleaning, suitable for chisel hammers GP 0248 HB, GP 0314 HK1 and LA 427 EU.



Type	Fitting [in]	Length [mm]	Suitable for	Order no.	EAN code
Chisel set	10.2	180	GP 0314 HK1	420.106	9009261201066
Flat chisel – 20 mm	10.2	180	GP 0314 HK1	420.108	9009261201080
Pointed chisel	10.2	180	GP 0314 HK1	420.112	9009261201127
Flat chisel – 20 mm	10.2	250	GP 0314 HK1	420.116	9009261201165
Pointed chisel	10.2	250	GP 0314 HK1	420.120	9009261201202
Flat chisel – 25 mm	12.8	220	GP 0109 NHB	420.122	9009261201226
Pointed chisel	12.8	220	GP 0109 NHB	420.126	9009261201264
Flat chisel – 30 mm	14.7	250	GP 0120 H	420.130	9009261201301
Pointed chisel	14.7	250	GP 0120 H	420.136	9009261201363
Needle deruster attachment G 100 H	10.2		GP 0314 HK1	420.092	9009261200922

Subject to technical modifications.

Random orbit sanders

Premium technology from AIRKO creates superior tools.

Random orbit sander GP 0498 A

Premium random orbit sander with 150 mm 6-hole Velcro sanding disc with oscillating circle of 9.5 mm for large surface transfer. Integrated stepless power control and safety switch with automatic stop for superior sanding results.

Quality profile ●●●●○



Integrated stepless power control



150 mm Velcro sanding disc



Low-noise and low-vibration with 360° rotating connection for dust extraction and user comfort



Non-slip, sensitive grip for perfect ergonomics and operation without fatigue

Random orbit sander GP 0424 A

Quality profile ●●●●○

Ultra-lightweight professional model with high sanding and polishing capacity (speed 12 000 rpm) and oscillating circle of 5 mm for perfect surface finishing and superior sanding results.



Random orbit sander GP 0413 DC

Quality profile ●●●●○

Compact, agile random orbit sander with oscillating circle of 5 mm and extraction system with suction hose for large surface transfer and perfect sanding results.



Type	Sanding disc diameter 6-hole [mm]	Speed [rpm]	Avg. air consumption* [l/min]	Weight [kg]	Oscillating circle diameter [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 0498 A	150	12 000	170	1.00	9.5	8	86	420.072	9009261200724
GP 0424 A	150	12 000	170	0.96	5.0	8	86	420.076	9009261200762
GP 0413 DC	150	10 000	390	1.13	5.0	10	83	420.078	9009261200786

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Grinders and angle grinders

The fine art of grinding. Perfected by AIRKO.

Axial grinder GP 0546SW

High-speed 25 000 rpm unit offers perfect grinding performance with standard collet for 6 mm grinding pins, ideal for the finest grinding work. Optimised air exhaust through rotatable air exhaust ring and very low vibration ensure comfortable operation.

Quality profile ●●●●○



Standard collet for 6 mm grinding pins



Ergonomic, non-slip, cold-insulated **handle** and low weight make for optimum handling



Safety switch to prevent unintentional activation and automatic stop



Optimised air discharge through rotatable exhaust ring

Axial grinder GP 0511 PW1

Quality profile ●●●○○

Axial grinder with standard collets for 6 mm and 3 mm grinding pins, supplied in case with 10 grinding stones for deburring, grinding and milling.



Angle grinder GP 0519 AXF 2

Quality profile ●●●●○

Compact angle grinder with powerful motor (0.68 kW) and high grinding capacity (speed 10 000 rpm) for roughing and cutting discs. Works with grinding discs of up to 125 mm in diameter and features M 14 spindle holder for standard grinding discs.



Type	Collet [mm]	Disc diameter [mm]	Speed [rpm]	Avg. air consumption* [l/min]	Weight [kg]	Length [mm]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 0546 SW	6		25 000	120	0.49	164	8	74	420.080	9009261200809
GP 0511 PW1	3 + 6		22 000	150	0.51	172	10	100	420.082	9009261200823
GP 0519 AXF 2		125	10 000	170	1.8	229	10	85	420.090	9009261200908

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Maintenance tools

Practical is better. AIRKO is the premier choice.

Putty / silicone gun GP 0835 C

Steel cartridge gun for standard 310 ml cartridges.

Quality profile ●●●○○



Grease gun GP 0843 K

Universal grease gun for standard 400 g DIN cartridges or direct filling.

Quality profile ●●●○○



Type	Volume [ml]	Cartridge [ml]	Avg. air consumption* [l/min]	Weight [kg]	Min. hose diameter [mm]	Sound level [dB(A)]	Order no.	EAN code
GP 0835 C	~	310	0.8/stroke	1.6	8	68	420.100	9009261201004
GP 0843 K	450	400	80	1.5	8	80	420.102	9009261201028
Grease hose							420.156	9009261201561
Coupling with 4 jaws							420.158	9009261201585

* All data refer to average air consumption at operating pressure of 6.3 bar. Air connection for all types 1/4". Subject to technical modifications.

Maintenance tools

The safety net you can trust. From AIRKO – who else?

Maintenance unit

Maintenance units are the most important safety feature for every user, consisting of a filter, controller and oiler.

Quality profile ●●●●●



Type	Connection [in]	Max. operating pressure [bar]	Control range* [bar]	Capacity [l/min]	Filter element** [µm]	Order no.	EAN code
07 series – 1/4"							
Maintenance unit	1/4	10	0.3 – 7	390	40	446.000	9009261460005
Controller	1/4	10	0.3 – 7	420		446.004	9009261460043
Filter controller	1/4	10	0.3 – 7	390	40	446.006	9009261460067
Filter	1/4	10		690	40	446.002	9009261460029
Oiler	1/4	10		402		400.972	9009261009723
Metal tank, (filter) controller	1/4	17				446.012	9009261460128
Metal tank, oiler	1/4	17				446.014	9009261460142
Automatic condensate drain	1/4					446.016	9009261460166
Mounting bracket	1/4					446.010	9009261460104
Spare pressure gauge, dia. 40 mm – 10 bar						426.304	9009261263040
82 series – 3/8"							
Maintenance unit	3/8	10	0.3 – 10	1440	40	446.310	9009261463105
Controller	3/8	10	0.3 – 10	1980		446.312	9009261463129
Filter controller	3/8	10	0.3 – 10	2220	40	446.309	9009261463099
Filter	3/8	10		1800	40	446.313	9009261463136
Oiler	3/8	10		1440		446.314	9009261463143
Spare pressure gauge, dia. 40 mm – 10 bar	3/8	17				446.036	9009261460364
84 series – 3/8"							
Filter controller with pressure gauge	3/8	17	0.7 – 17		40	446.297	9009261462979
Pressure controller with pressure gauge	3/8	17	0.7 – 17			446.296	9009261462962
84 series – 1/2"							
Maintenance unit	1/2	10	0.3 – 10	3000	40	446.291	9009261462917
Controller	1/2	10	0.3 – 10	3600		446.292	9009261462924
Filter controller	1/2	10	0.3 – 10	3000	40	446.293	9009261462931
Filter	1/2	10		2280	40	446.294	9009261462948
Oiler	1/2	10		3840		446.295	9009261462955
Metal tank, (filter) controller	1/2	17				446.300	9009261463006
Metal tank, oiler	1/2	17				446.301	9009261463013
Automatic condensate drain	1/2					446.302	9009261463020
Shut-off valve	1/2					446.303	9009261463037
Clamp with angle bracket for maintenance unit	1/2					446.306	9009261463068
Oil-free outlet	1/2					446.304	9009261463044
Angle bracket for single device	1/2					446.305	9009261463051
Spare pressure gauge, dia. 40 mm – 10 bar						446.307	9009261463075
Spare pressure gauge, dia. 40 mm – 20 bar						446.308	9009261463082
Tool oiler for pneumatic tools						420.104	9009261201042

* Different control ranges available on request ** Additional filter elements available on request. Subject to technical modifications.

Spray-painting guns

The best choice for the right tool: AIRKO.

Spray-painting gun GS 151 M-U

Quality profile ●●●●●

Professional, premium-quality LVLP model with stepless control of paint quantity, air volume and stream width, and micrometer for fine adjustment. Flat stream and cone settings with a paint transfer rate of 70%/min.



High-quality nylon tank with a volume of 600 ml, drip guard and paint sieve



Ergonomic, perfectly positioned **handle** and functional design for professional results

Spray-painting gun GS 101 M

Quality profile ●●●●○

High-quality gun using economical HVLP technology, steplessly adjustable cone and flat stream, with micrometer for rough and fine adjustment, made of stainless steel suitable for water-based paint.



Spray-painting gun GS 137 MB

Quality profile ●●●●○

Perfect all-purpose model, particularly suitable for thick-layer materials, with control of paint quantity, air volume and stream width, and adjustable flat stream and cone.



Spray-painting gun GS 102 M

Quality profile ●●●●○

Professional version of a universal model for all paint types, ideal for use with thick-layer materials thanks to the high inlet pressure and very fine paint atomisation.



Type	Nozzle size [mm]	Inlet pressure [bar]	Paint transfer rate [%/min]	Paint stream width [mm]	Nozzle/needle	Avg. air consumption [l/min]	Tank [litres]	Weight [kg]	Order no.	EAN code
GS 151 M-U LVLP	1.7	1-2	70	320	Stainless steel	260	0.6	0.62	424.108	9009261241086
GS 101 M HVLP	1.5	1-2	65	320	Stainless steel	260	0.6	0.62	424.132	9009261241321
GS 137 MB	2.0	2-3	40	330	Stainless steel	220	0.6	0.52	424.016	9009261240164
GS 102 M	1.4	2-3	40	280	Stainless steel	200	0.6	0.62	424.050	9009261240508

Subject to technical modifications.

Spray-painting guns

Original quality accessories from AIRKO.

Nozzle sets and accessories

From fine to powerful, AIRKO nozzle sets contain the optimum size of nozzle for every application as well as offering outstanding quality and value for money. Made of stainless steel.



1



2



3



4

Item name	Illustration	Nozzle set [mm]	Order no.	EAN code
GS 137 MB		2.0	424.020	9009261240201
		2.5	424.022	9009261240225
GS 102 M	1	1.3	424.062	9009261240621
		1.4	424.064	9009261240645
		1.5	424.066	9009261240669
		1.7	424.068	9009261240683
		2.0	424.070	9009261240706
		2.5	424.072	9009261240720
GS 151 M-U LVLP	1	1.3	424.120	9009261241208
		1.4	424.122	9009261241222
		1.5	424.124	9009261241246
		1.7	424.126	9009261241260
		2.0	424.128	9009261241284
		2.5	424.130	9009261241307
GS 101 M HVLP	1	1.3	424.144	9009261241444
		1.4	424.146	9009261241468
		1.5	424.148	9009261241482
		1.7	424.150	9009261241505
		2.0	424.152	9009261241529
		2.5	424.154	9009261241543
Hose filter for attachment to spray-painting guns, semi-automatic condensate drain	2		424.176	9009261241765
Tank with inner thread, 0.6 litres, suits all spray-painting guns	3		424.178	9009261241789
Paint sieve for spray-painting guns, 230 µm	4		424.180	9009261241802

Quality maintenance equipment

The classic tyre inflators: Airmotion from AIRKO.

Tyre inflator Airmotion classic I

Quality profile ●●●●●

The AIRKO Airmotion series is the "classic" among the mobile tyre inflators. Robust and user-friendly precision design, high measuring accuracy and excellent operating safety along with a reliable and calibrated inflator gauge are the characteristic features of this "classic". Ideal for service and self-service, with 1.25 m filling hose and specially curved, two-sided twin plug.



Ergonomic handle with automatic inflator valve



Waterproof pressure gauge and simple control buttons at front



Two-sided **twin plug**



Accessories (f.l.t.r.)
Moment insertion nipple
Twin plug
Lever valve plug

Airmotion classic I tyre inflator

Quality profile ●●●●●

The classic mobile tyre inflator with 1.25 m hose and two-sided specially curved twin plug.



Airmotion mobile tyre inflator

Quality profile ●●●●●

Mobile tyre inflator with gauge for connection to the compressed air supply, with 1.25 m hose and lever valve plug.



Airmotion wall tyre inflator

Quality profile ●●●●●

Specially designed for inflating and checking lorry and car tyres. 8 m hose with lever valve plug.



Type	Tank volume [litres]	Connection	Maximum pressure [bar]	Indicator range [bar]	Reading accuracy [bar]	Dimensions L x H [cm]	Weight [kg]	Order no.	EAN code
Airmotion classic I	6	Twin plug	12	0–10	0.1	38 x 76	6.8	425.004	9009261250040
Spare inflator valve for classic I								425.002	9009261250026
Airmotion mobile	–	Twin plug	12	0–10	0.1	38 x 53	4.7	425.006	9009261250064
Airmotion wall	–	Lever valve	12	0–10	0.1	27 x 40	9.0	425.008	9009261250088
Twin plug								425.012	9009261250125
Moment insertion nipple								425.014	9009261250149
Lever valve plug								425.016	9009261250163

Subject to technical modifications.

Quality maintenance equipment

Check, inflate, measure and deflate – with AIRKO tyre inflators.

Professional manual tyre inflator 25GR-80

Professional inflator with high-quality calibrated 80 mm WIKA precision pressure gauge giving exact readings from 0 to 12 bar and oil-resistant rubber protection for pressure gauge and handle. Convenient single-lever function for checking, inflating and deflating.


Quality profile ●●●●●



Clearly legible, calibrated **pressure gauge** (DM symbols) 80 mm



Ergonomic, cold-insulated handle with 500 m hose

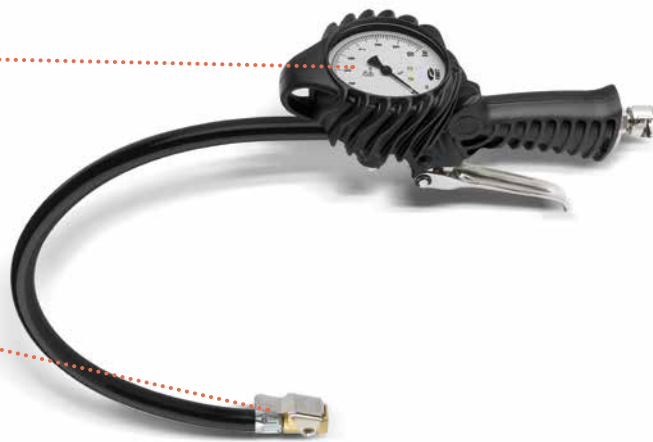

Accessories
Moment insertion nipple
Twin plug
Lever valve plug



Universal inflating set:
Brass nozzle for bicycle valve, ball hollow needle, brass blow-out nozzle and nozzle for inflatable boats etc.

Professional manual tyre inflator 25G-60

Quality profile ●●●●○

Tyre inflator with high-quality pressure gauge (with pressure fluctuation protection), protective cap, single-lever operation for checking, inflating and deflating.



Manual tyre inflator 25D-RB

Quality profile ●●●●○

Tyre inflator with ergonomic cold-insulated handle, pressure gauge with protective cap and 3 functions: inflate, measure, deflate.



Manual tyre inflator 25 D

Quality profile ●●●●○

Tyre inflator with ergonomic handle, pressure gauge with protective cap and 3 functions: inflate, measure, deflate.



Type	Plug	Maximum pressure [bar]	Pressure gauge diameter [mm]	Indicator range [bar]	Hose length [cm]	Order no.	EAN code
Professional manual tyre inflator 25GR-80 CEE, calibrated	Lever valve	12	80	0-12	500	425.018	9009261250187
Professional manual tyre inflator 25G-60	Lever valve	10	60	0-10	400	425.022	9009261250224
Manual tyre inflator 25D-RB	Lever valve	10	60	0-10	400	425.024	9009261250248
Manual tyre inflator 25D	Lever valve	10	60	0-10	400	425.026	9009261250262
Hose complete with lever valve plug						425.028	9009261250286
Hose complete with moment insertion nipple						425.080	9009261250804
Pressure gauge 60 , 1/4" – connection at the back						425.030	9009261250309
Pressure gauge 60 , 1/4" – connection at the bottom						425.219	9009261252198
Pressure gauge 80 1/4", calibrated – for professional manual tyre inflator 25 GR-80						425.034	9009261250347
Twin plug						425.012	9009261250125
Moment insertion nipple						425.014	9009261250149
Lever valve plug						425.016	9009261250163
Bicycle pump kit						425.070	9009261250705

Subject to technical modifications.

Quality maintenance equipment

Blow-out guns with exceptional AIRKO performance.

Professional blow-out gun AP/3AR

Quality profile ●●●●●

For professional use, with special nozzle design for a high degree of noise reduction.



Blow-out gun AP/AR

Quality profile ●●●●●

For professional use, with special nozzle design for a high degree of noise reduction (< 78 dB(A)).

Blow-out gun AP/3G

Quality profile ●●●●●

For professional use, removable rubber surround for nozzle tip makes it particularly suitable for sensitive surfaces.

Blow-out gun AP/AN

Quality profile ●●●●●

For professional use, with special nozzle design to provide air barrier for safe use.

Blow-out gun AP/V

Quality profile ●●●●●

For professional use, with special venturi nozzle design providing around 100 % more air volume.



Type	Air requirement [l/min]	Maximum pressure [bar]	Connection [in]	Nozzles	Order no.	EAN code
Professional blow-out gun AP/3AR	380	10.0	1/4	Noise-reduced	425.036	9009261250361
Blow-out gun AP/AR	300	10.0	1/4	Noise-reduced	425.038	9009261250385
Blow-out gun AP/3G	380	10.0	1/4	Stepped long nozzle	425.040	9009261250408
Blow-out gun AP/AN	220	10.0	1/4	Short nozzle	425.042	9009261250422
Blow-out gun AP/V	220	10.0	1/4	Injector nozzle	425.044	9009261250446

Subject to technical modifications.

Quality maintenance equipment

AIRKO quality makes good maintenance twice as effective.

Blow-out gun 25/B1/RB

Quality profile ●●●●○

Quality blow-out gun with short nozzle and non-slip cold-insulated handle.



Blow-out gun 25/B2/RB

Quality profile ●●●●○

Quality blow-out gun with 200 mm long nozzle and non-slip cold-insulated handle.



Blow-out gun with short and long nozzle

Quality profile ●●●●○

Handy blow-out gun with a short nozzle and a separate long nozzle 130 mm for changing.



Combi gun

Quality profile ●●●●○

for underbody protection and cavity sealing, with special 900 mm long spray hose.



Spray gun

Quality profile ●●●●○

with metal tank featuring bayonet lock, adjustable air volume and adjustable spray nozzle.



Professional sand-blasting gun

Quality profile ●●●●○

with metal tank and nozzle 6 mm.



Professional sand-blasting gun

Quality profile ●●●●○

with 1.2 m long intake hose and 6 mm nozzle.



Type	Air requirement [l/min]	Maximum pressure [bar]	Connection [in]	Nozzles	Order no.	EAN code
Blow-out gun 25/B1/RB	200	10.0	1/4"	Short nozzle	425.046	9009261250460
Blow-out gun 25/B2/RB	250	10.0	1/4"	Long nozzle	425.048	9009261250484
Blow-out gun with short and long nozzle	200	10.0	1/4"	Short / long nozzle	425.052	9009261250521
Combi gun for underbody protection and cavity sealing	150	7.0	1/4"		425.054	9009261250545
Hose for combi gun					425.056	9009261250569
Spray gun	100	10.0	1/4"	1 l tank	425.078	9009261250781
Professional sand-blasting gun with metal tank	350	7.0	1/4"	1 l tank	425.058	9009261250583
Professional sand-blasting gun with intake hose	400	7.0	1/4"	1.2 m hose	425.060	9009261250606
Spare nozzle 6 mm					425.062	9009261250620
Spare nozzle 8 mm					425.064	9009261250644

Subject to technical modifications.